

Instructions for mounting the clamp On swivel KRS25 / KRS30

Models concerned

KRS25 (ref. PF333 250) / KRS30 (ref. PF333 300)

Document

Customer assembly notice


Date

June 2026



Assembly

1. Check the presence of nuts in the clamp
2. Position the two clamps around the snap ring.
3. Screw the two screws
4. Make sure that the clamps does not rotate

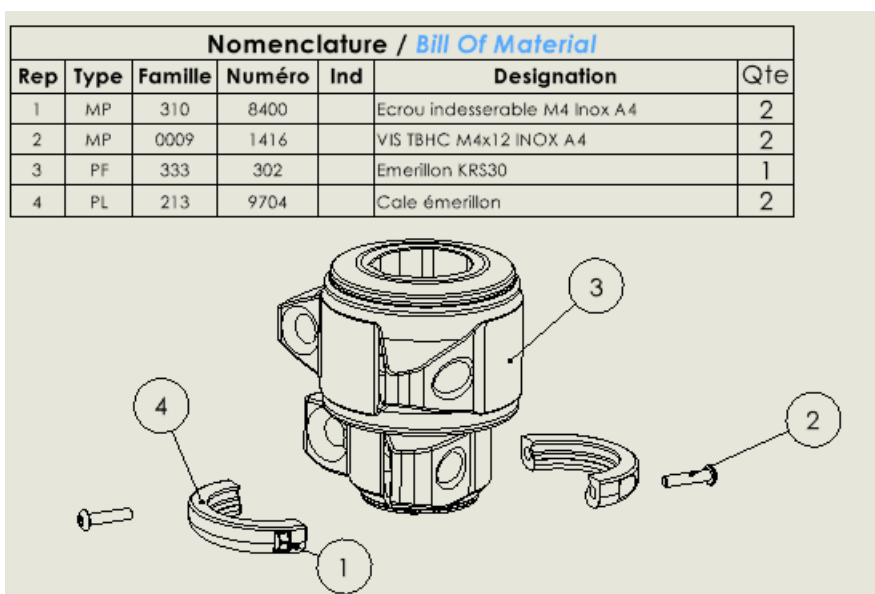

Recommendations

IMPORTANT

Never force the insertion of clamps

Be careful with the nut, don't let it leave its housing.